Schematic Diagram of WT-100A Electron-Tube MicroMhoMeter

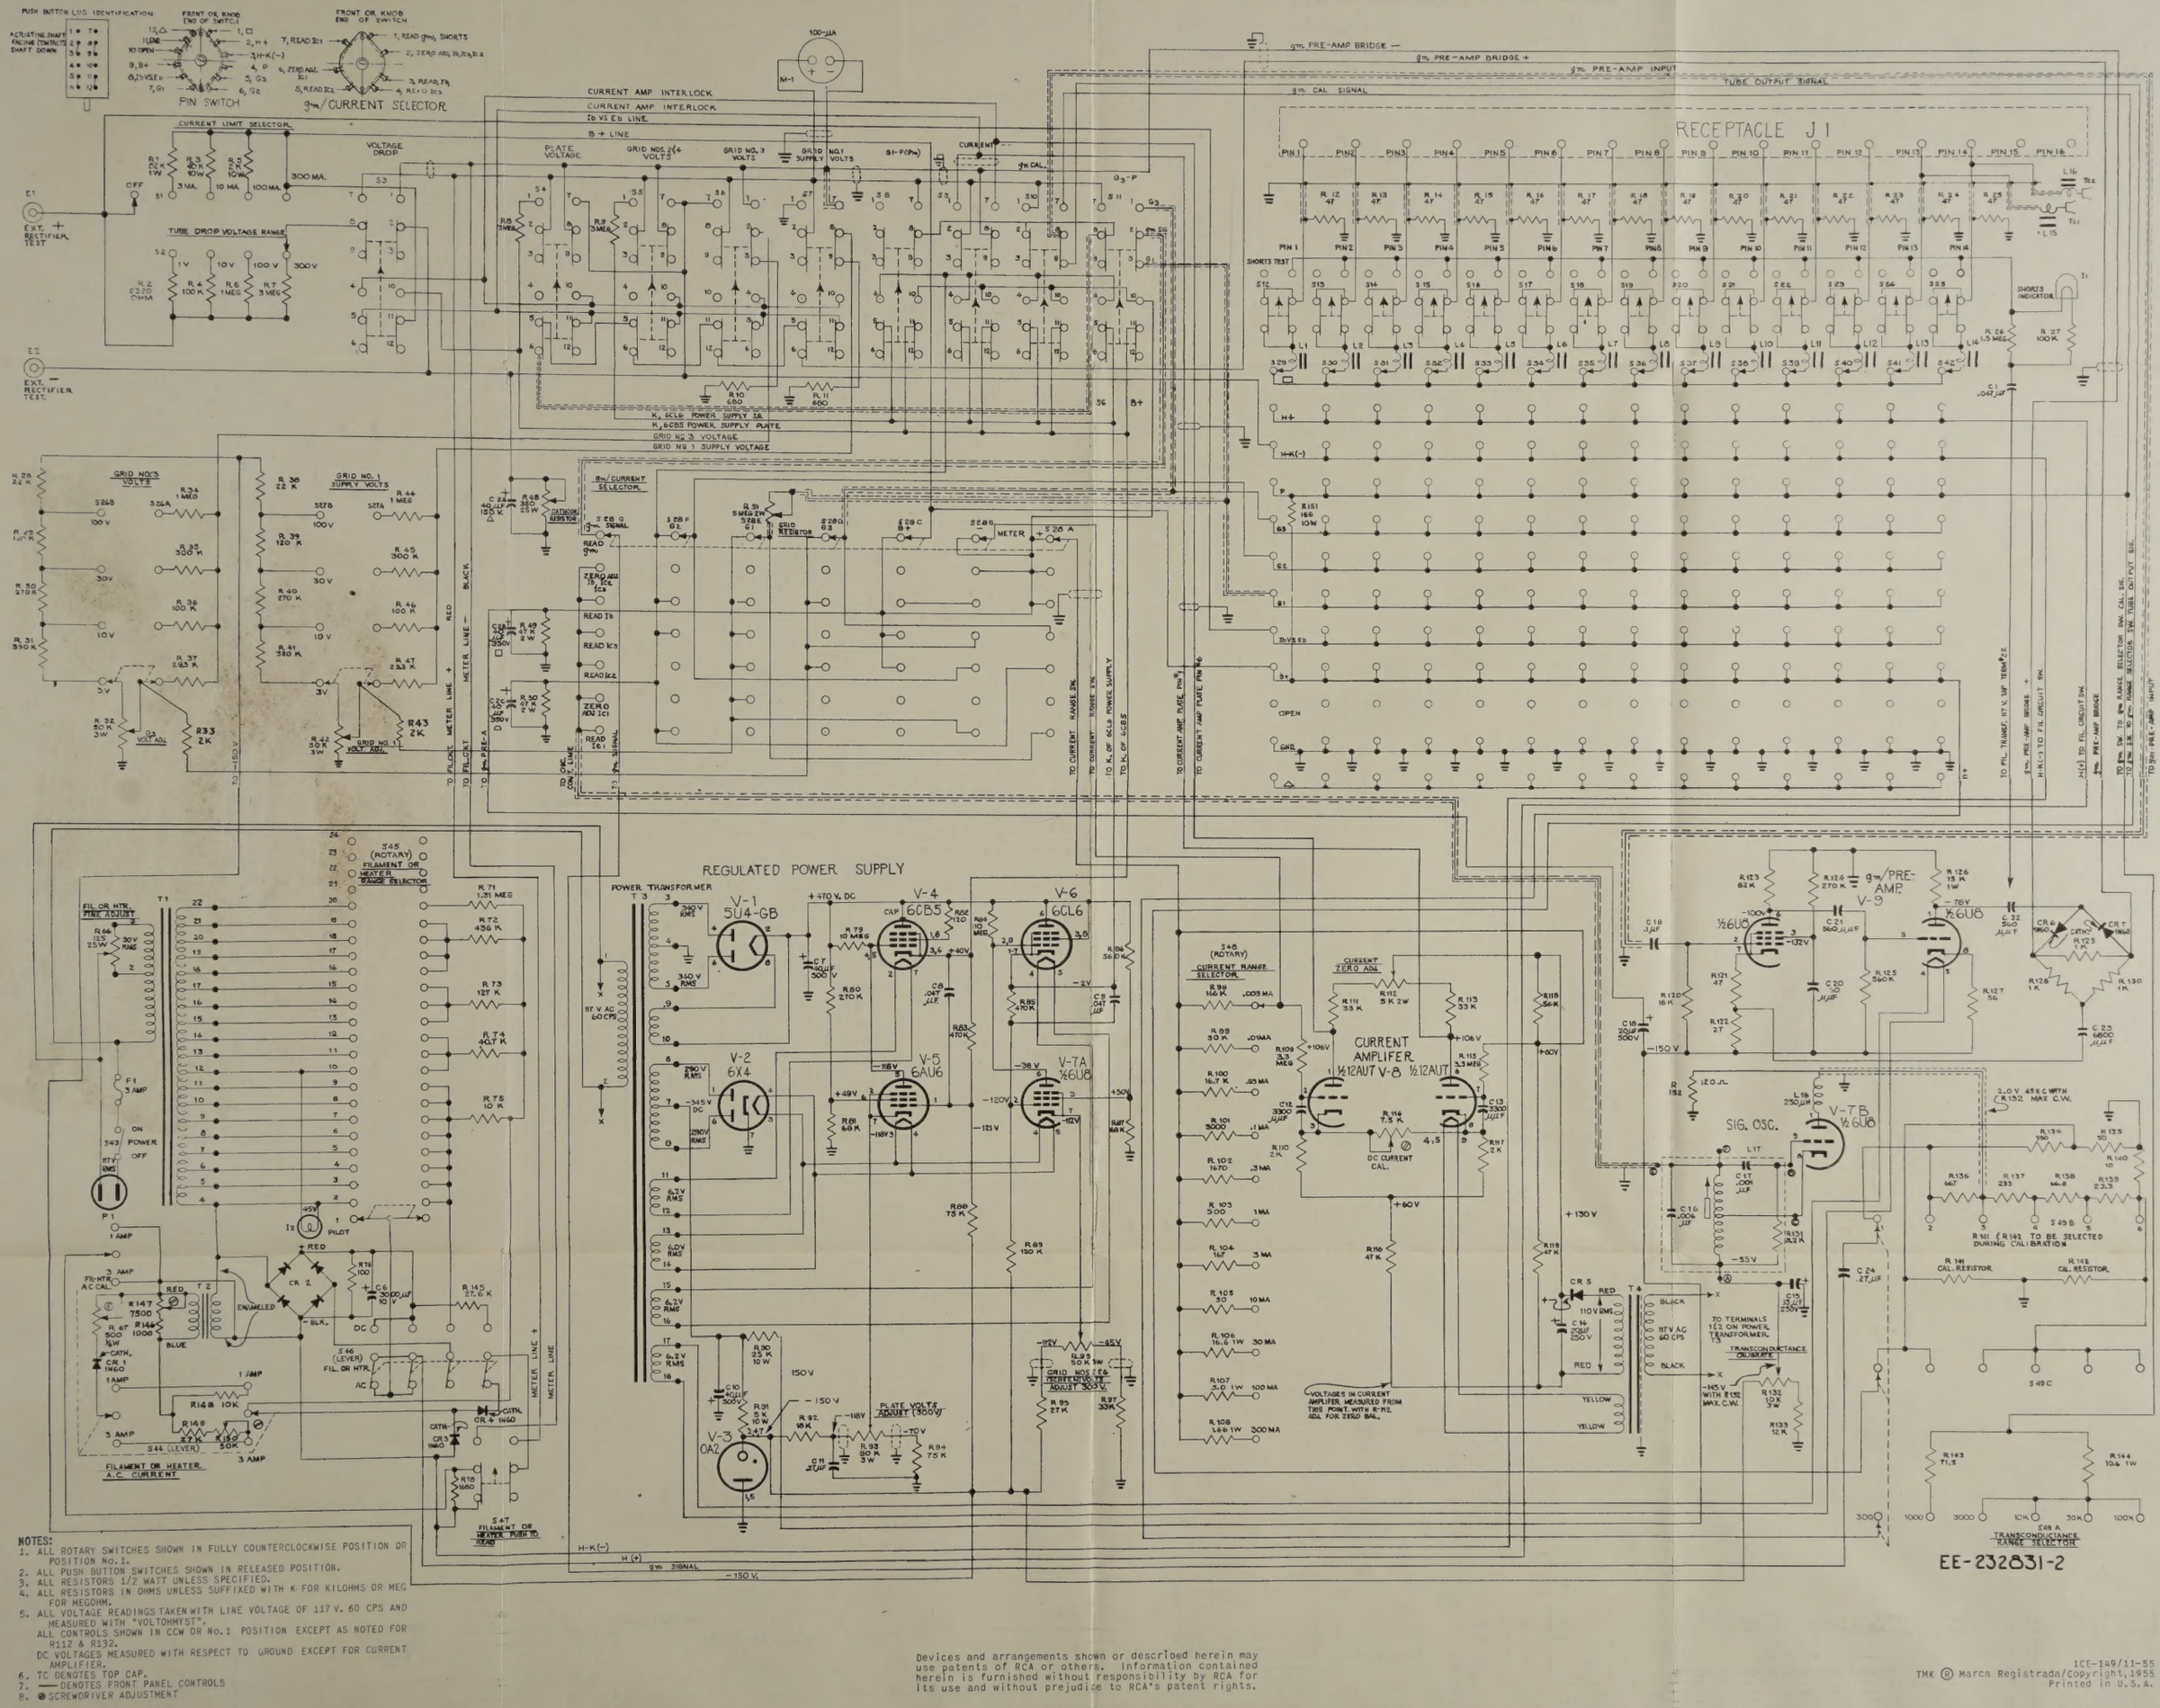

NOTES:

1. ALL ROTARY SWITCHES SHOWN IN FULLY COUNTERCLOCKWISE POSITION OR POSITION No.1.
2. ALL PUSH BUTTON SWITCHES SHOWN IN RELEASED POSITION.
3. ALL RESISTORS 1/2 WATT UNLESS SPECIFIED.
4. ALL RESISTORS IN OHMS UNLESS SUFFIXED WITH K FOR KILOHMS OR MEG FOR MEGOHM.
5. ALL VOLTAGE READINGS TAKEN WITH LINE VOLTAGE OF 117 V. 60 CPS AND MEASURED WITH "VOLTOHMYST". ALL CONTROLS SHOWN IN CCW OR No.1 POSITION EXCEPT AS NOTED FOR R112 & R132. DC VOLTAGES MEASURED WITH RESPECT TO GROUND EXCEPT FOR CURRENT AMPLIFIER.
6. TC DENOTES TOP CAP.
7. —— DENOTES FRONT PANEL CONTROLS
8. ⊘ SCREWDRIVER ADJUSTMENT

Devices and arrangements shown or described herein may use patents of RCA or others. Information contained herein is furnished without responsibility by RCA for its use and without prejudice to RCA's patent rights.

EE-232831-2

1CE-149/11-55
TMK ® Marca Registrada/Copyright, 1955
Printed in U.S.A.